


Descanso®

StyleTherm® 1/2" Thermostatic Shower System

KT13-30K.FR

"ZZ" denotes finish, "FR" denotes flow rate

Item	Model	Description	Links
1	SH-083.FR-ZZ	5-5/8" Multi-Function Showerhead	Specification Sheet
2	SH-01.6-ZZ	One Piece 6" Shower Arm & Flange	Specification Sheet
3	HS-083-30K.FR-ZZ	4-1/16" Brass Multi-Function Handshower	Specification Sheet
4	9129-30K-ZZ	Slide Bar Handshower Kit	Specification Sheet
5	TO-THF2L-30K-ZZ	StyleTherm® Trim Only with Dual Volume Control	Specification Sheet

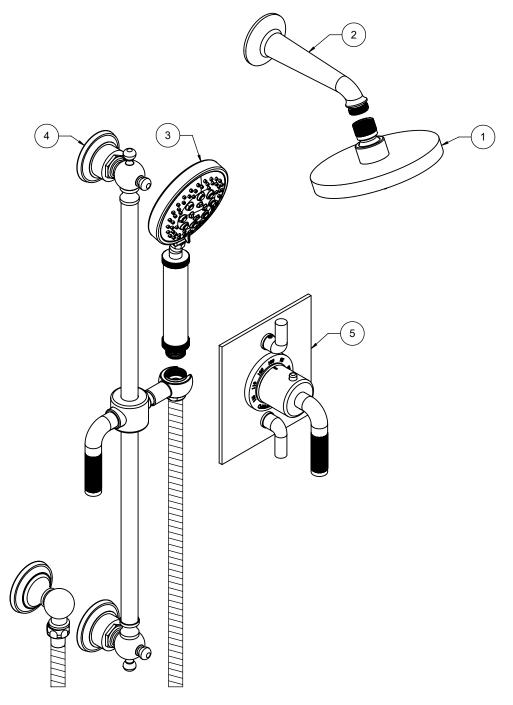

Specifications subject to change without notice



<u>SHOWERHEAD</u> 5-5/8" MULTI-FUNCTION CONTEMPORARY

Features

- 1/2" FIP inlet
- 3 function: rain, air & massage
- Self-cleaning rubber jets Solid brass pivot ball & body
- *5-5/8" diameter, gray face Available in 28 finishes including 13 PVD finishes*
 - Replace .FR with desired max flow rate: SH-083.25 for 2.5 gpm SH-083.20 for 2.0 gpm SH-083.18 for 1.8 gpm

Codes/Standards

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1

- CEC (1.8 gpm) DOE (2.5, 2.0, & 1.8 gpm) Commonwealth of MA
- EPA WaterSense Showerhead (2.0 gpm)







SH-083.25

SH-083.20

SH-083.18

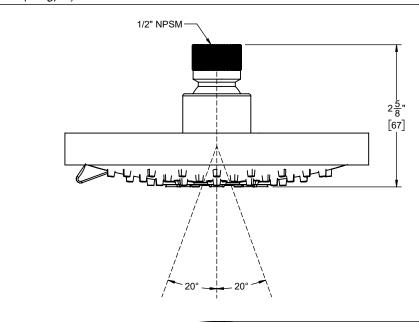

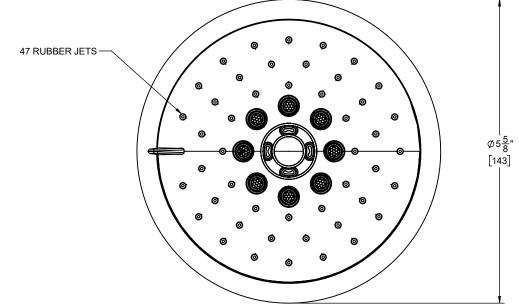

DIMENSIONS SHOWN TO NEAREST 1/16" [DIMENSIONS SHOWN TO NEAREST 1MM]





One Piece 6" Shower Arm & Flange

SH-01.6


Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction



Codes/Standards

- Product meets or exceeds the following:
- ASME A112.18.1/CSA B125.1 .

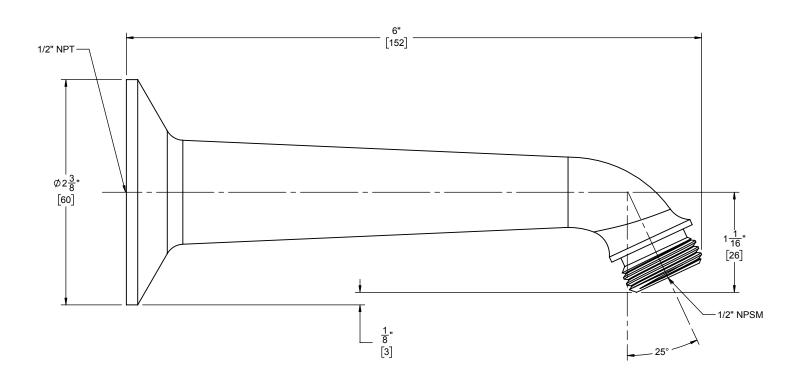

www.californiafaucets.com

Dimensions are inches, rounded to 1/16" [Dimensions in brackets are mm, rounded to 1mm]



<u>Handshower</u>

HS-083-30K.18

HS-083-30K.20

HS-083-30K.25


4-1/16" MULTI-FUNCTION DESCANSO[®] HANDSHOWER


Features

- 1/2" MIP inlet
- 3 function handshower: rain, air, & massage
- Self cleaning rubber jets
- Brass body
- 4-1/16" diameter, gray face
- Replace .FR with desired max flow rate: HS-083-30K.25 for 2.5 gpm HS-083-30K.20 for 2.0 gpm HS-083-30K.18 for 1.8 gpm Over 28 finishes including 13 PVD finishes
- **Codes/Standards Applicable**

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (1.8 gpm) DOE (1.8. 2.0, & 2.5 gpm)
- Commonwealth of MA
- EPA WaterSense (2.0 gpm)

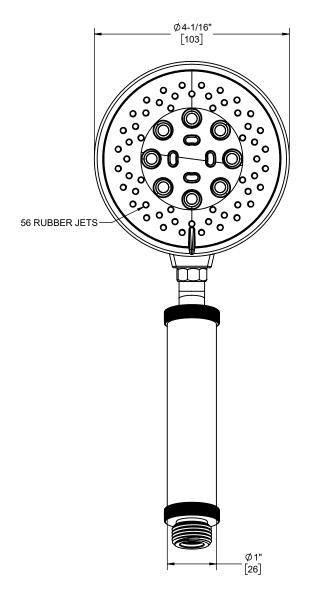

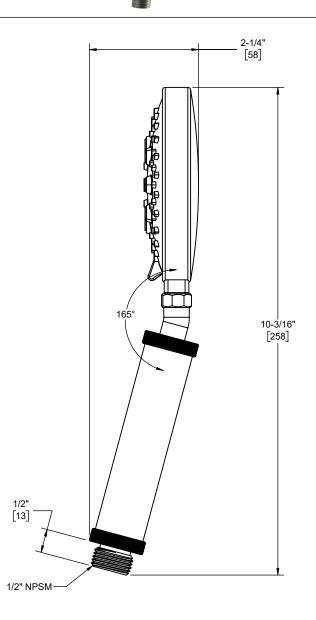

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16" [ALL DIMENSIONS SHOWN TO NEAREST 1MM]






Slide Bar Handshower Kit

9129-30K

Iten	n Model	Description	Links
1	SH-10-48-ZZ	Decorative Supply Elbow	Specification Sheet
2	SB-30K-ZZ	Wall Mounted Slide Bar	Specification Sheet
3	HS-68-ZZ	68" Brass Hose for Handshower	Specification Sheet

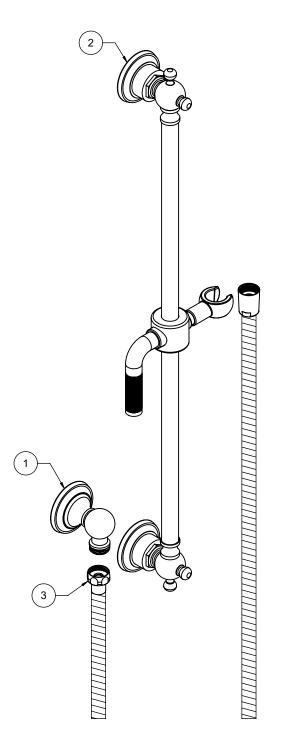



STYLETHERM TRIM ONLY W/ DUAL VOLUME CONTROL

Features

- All brass construction
- 100°F safety stop button with manual override
- Dual integral volume control 6" by 5-1/4" rectangular faceplate; flat profile Less head, arm, flange and spout

- Engraved brass temperature ring Over 30 finishes including 15 PVD finishes

Codes/Standards Applicable

- Product meets or exceeds the following: ASME A112.18.1/CSA B125.1
- ASSE 1016
- ADA compliant




TO-THF2L-30K TO-THF2L-30F

Descanso"

ТМ

(TO-THF2L-30K SHOWN)

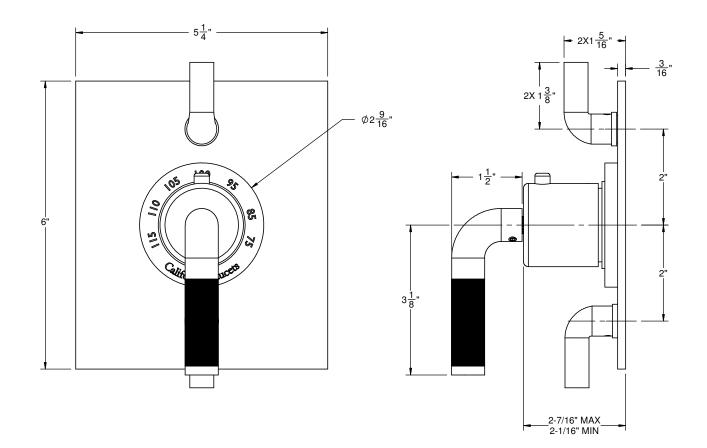

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"